

Complies with the machinery directives 2006/42/EC



4 better lifting

CE



NB: Please ensure that the safety instructions have been fully read and understood before initial use of the RM bolt-on lifting point. Failure to do so may result in serious injuries and/or material damage and eliminates manufacturers warranty.

User Instructions - Part 1

Safety instructions

This safety instruction/declaration of the manufacturer must be kept on file for the lifetime of the product.

ATTENTION: Please inspect all lifting points prior to use. Damage, incorrect assembly or improper use may result in serious injuries and/or material damage.

EC-Declaration of the manufacturer

According to the Machinery Directive 2006/42/EC, annex II B and amendments.

We hereby declare that the design and construction of the equipment detailed within this document, adheres to the appropriate level of health and safety of the corresponding EC regulation.

Any un-authorized modification and/or any incorrect use of the equipment not adhered to within these user instructions waives this declaration invalid.

The equipment must be regularly tested and inspected as per BGR 500. Failure to carry out the recommended maintenance and testing waives this declaration invalid.

Designation of the equipment:

Type: **RM bolt-on lifting point**

Manufacturer's mark:

Drawings (iges, dxf and step), product information and other support material can be downloaded from www.rud.com.au.

EC-Declaration of conformity

According to the EC-Machinery Directive 2006/42/EC, annex II A and amendments

Manufacturer: **RUD Ketten
Rieger & Dietz GmbH u. Co. KG
Friedensinsel
73432 Aalen**

We hereby declare that the equipment sold by us because of its design and construction, as mentioned below, corresponds to the appropriate, basic requirements of safety and health of the corresponding EC-Machinery Directive 2006/42/EC as well as to the below mentioned harmonized and national norms as well as technical specifications. In case of any modification of the equipment, not being agreed upon with us, this declaration becomes invalid.

Product name: Eye nut
RM

The following harmonized norms were applied:

<u>EN 12100</u>	<u>EN 1677-1</u>
_____	_____
_____	_____

The following national norms and technical specifications were applied:

<u>BGR 500, KAP2.B</u>	_____
_____	_____
_____	_____

Authorized person for the configuration of the declaration documents:
Reinhard Smetz, RUD Ketten, 73432 Aalen

Aalen, 03.01.2013

Dr. Ing. Rolf Smetz, (Prokurist/CMB)

Name, function and signature of the responsible person

User Instructions - Part 2

1. Reference should be made to relevant standards and other statutory regulations. Inspections should be carried out by competent persons only.
2. Before installation and at every use, visually inspect RUD lifting points, with particular attention to any evidence of corrosion, wear, weld cracks and deformations. Please ensure compatibility of bolt thread and tapped hole.
3. RUD eyenuts are only to be used with bolts or threaded studs with a minimum quality class 8.8. Non certified bolts or threaded studs are not allowed.
4. The lifting points must be positioned on the load in such a way that movement is avoided during lifting.
 - a.) For single leg lifts, the lifting point should be vertically above the centre of gravity of the load.
 - b.) For two leg lifts, the lifting points must be equidistant to/above the centre of gravity of the load.
 - c.) For three and four leg lifts, the lifting points should be arranged symmetrically around the centre of gravity in the same plane.
5. Load symmetry: The working load limit of individual RUD lifting points are calculated using the following formula and are based on symmetrical loading: The calculation of load bearing legs is as follows:

$W_{LL} = \frac{G}{n \times \cos \beta}$	WLL = required of lifting point/individual leg (kg) G = load weight (kg) n = number of load bearing legs β = angle of inclination of the individual leg
--	--

NOTE: For WLL Calculations

- β angle is taken from the vertical plane.
- Included angle is the angle between the sling legs.



6. Safety: When lifting points are used in a multileg assembly, care should be taken to calculate the WLL (Working Load Limit) due to the deration caused by forces acting in multiple directions. The reduction in WLL (Working Load Limit) for multileg assemblies should be checked with relevant Standards e.g. AS 3775-2004 - Chain Slings-Gr t (8)

The lifting points should be mounted in such a way that they may easily be accessed for inspection and assembly/disassembly of the sling.

7. A plane bolting surface must be guaranteed to ensure correct mating of the lift component. The internal thread has to be 100% engaged on the bolt thread.

8. Rotation of the eyenut/s under load must be avoided.

9. All fittings connected to the eyenut should be free moving. When connecting and disconnecting the lifting means (wire ropes, chain slings, round slings) pinches and impacts should be avoided. Damage to lifting components caused by sharp corners should also be avoided.

10. To prevent unintended dismounting through shock loading, rotation or vibration, thread locking fluid such as Loctite (depending on the application, please refer to the manufacturer's instruction) should be used to secure the eyenut.

11. Effects of temperature: If the RUD-Eyenuts are to be used in temperatures ranging from 200°C upwards, the WLL has to be reduced accordingly:

-10° up to 200°C no reduction (14°F up to 392°F)

200° up to 300°C minus 10% (392°F up to 572°F)

300° up to 400°C minus 25% (572°F up to 752°F)

Temperatures above 400°C (752°F) are not permitted. Please pay attention to the max. temperature areas for the bolts and threaded studs.

12. RUD-Lifting points must not be used under chemical influences such as acids, alkaline solutions and vapours e.g. in pickling baths or hot dip galvanising plants. If this cannot be avoided, please contact the manufacturer indicating the concentration, period of penetration and temperature of use.

13. After fitting, an annual inspection or sooner if conditions dictate should be under taken by a competent person examining the continued suitability. Also inspect after damage and special occurrences.

Inspection criteria concerning paragraphs 2 and 13:

- Ensure tightness
- Ensure correct bolt (threaded stud) size, quality and length
- The plane area of the eyenut must properly flat down on the work piece.
- The lifting point should be complete.
- The working load limit and manufacturers stamp should be clearly visible.
- Deformation of the component parts such as body, load ring and threaded stud
- Mechanical damage, such as notches, particularly in high stress areas.
- Wear should be no more than 10% of cross sectional diameter.
- Evidence of corrosion.
- Evidence of cracks.
- Damage to the bolt, nut and/or thread.

Any non-adherence to this advice may result in damages of persons and/or materials!

User Instructions - Part 3

WORKING LOAD LIMITS (G - in tonnes)		
PRODUCT DESCRIPTION	Single Leg	Single Leg
	ϕ G VERTICAL LIFT	G 90°
RM-M6	0.4 t	0.1 t
RM-M8	0.8 t	0.2 t
RM-M10	1 t	0.25 t
RM-M12	1.6 t	0.4 t
RM-M16	4 t	0.8 t
RM-M20	6 t	1.5 t
RM-M24	8 t	2 t
RM-M30	12 t	3 t
RM-M36	16 t	4 t
RM-M42	24 t	6 t
RM-M48	32 t	8 t

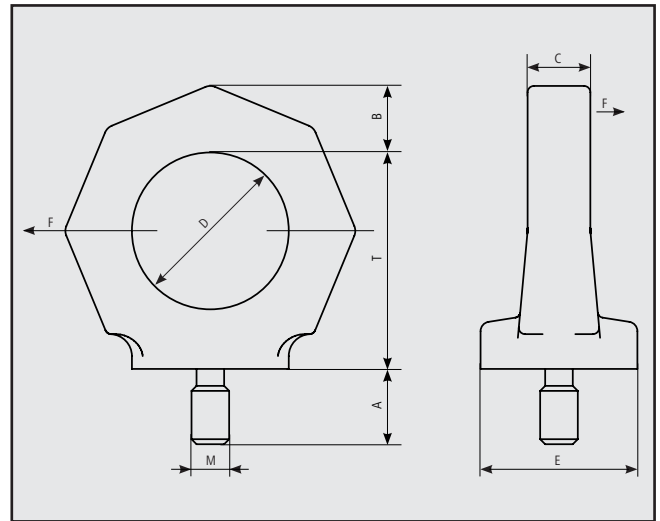


Table 1

Type	WLL (t)	A	B	C	D	E	M	T	Weight (kg)	Ref.-No.
RM – M 6	0.1	12	11	10	25	25	11	35	0.1	55254
RM – M 8	0.2	12	11	10	25	25	11	35	0.1	55255
RM – M 10	0.25	15	11	10	25	25	11	35	0.1	55258
RM – M 12	0.4	18	13	12	30	30	12	41	0.2	55271
RM – M 14	0.75	21	15	14	35	35	13	48	0.25	55281
RM – M 16	0.8	24	15	14	35	35	13	48	0.3	55460
RM – M 20	1.5	30	17	16	40	40	16	55	0.45	55343
RM – M 24	2	36	21	20	50	50	20	70	0.7	55394
RM – M 30	3	45	26	24	60	60	25	85	1.6	55438
RM – M 36	4	54	43	38	90	100	37	130	6.0	53093
RM – M 42	6	53	43	38	90	100	37	130	6.2	53095
RM – M 48	8	68	43	38	90	100	37	130	6.4	53098

Table 2

Type	WLL (t)	A	B	C	D	E	F	T	Weight (kg)	Ref.-No.
RM-3/8"-16UNC	0.2	12	11	10	25	25	3/8"	34	0.1	7101103
RM-1/2"-13UNC	0.35	14	13	12	30	30	1/2"	41	0.2	7101104
RM-5/8"-11UNC	0.75	16	15	14	35	35	5/8"	48	0.3	7101105
RM-3/4"-10UNC	1.2	18	17	16	40	40	3/4"	55	0.45	7101106
RM-7/8"-9UNC	1.5	22	21	20	50	50	7/8"	70	0.7	7101107
RM-1"-8UNC	2.0	28	26	24	60	60	1"	85	1.5	7101108
RM-1 1/4"-7UNC	3.0	28	26	24	60	60	1 1/4"	85	1.4	7982594

Table 3