

## Load ring VLBG 1,2t M14 with bolt (H=21)

Artikel-Nr: 8600399




- **Lifting points pivots 360°. Suspension ring pivots 180°**
- **Captive but exchangeable ICE-Bolt** made out of patented steel with special corrosion protection Corrud-DT. Non-hazardous deep temperature usage down to -60°; higher toughness and therefore higher bending strength as well as less wear occurrence. Original ICE-Bolt is available as a spare part. Clear marking at the bolt head: RUD, ICE, thread size, batchno., class of strength.
- **Clamping spring** works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lifting mean possible respectively flat design if turned down.
- **Clear marking of the minimum WLL** for all loading directions.
- Available as:
  - Standard Metric Thread (DIN EN 13)
  - Metric Fine Thread (DIN EN 13)
  - Coarse Pitch Thread UNC (ANSI B1.1)
  - Fine Thread UNF (ANSI B1.1)
- Variable bolt lengths available for tapped or through holes.
- Tested and certified by DGUV Testing specifications: GS-OA-15-04:2012-05 Certificate No.: OA 1451016
- Quick and easy installation with just one bolt connection.
- Assembly with flat / ring wrench or allen key possible.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
- Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

## Load ring VLBG 1,2t M14 with bolt (H=21)

Artikel-Nr: 8600399

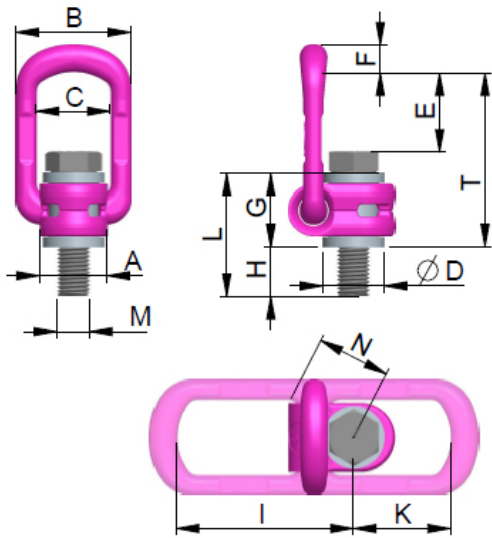

T	85 mm	3-11/32"
A	33 mm	1-5/16"
B	56 mm	2-3/16"
C	36 mm	1-27/64"
D	30 mm	1-3/16"
E	39 mm	1-9/16"
F	13,5 mm	17/32"
G	36 mm	1-27/64"
H	21 mm	13/16"
I	86 mm	3-3/8"
K	47 mm	1-7/8"
L	57 mm	2-1/4"
M	M14 mm	M14
N	38 mm	1-1/2"
<b>weight</b>	0.52 kg	1.15 lbs
<b>Nominal WLL</b>	1200 kg	2650 lbs