

Load ring VLBG 7t M36 with special-bolt

Artikel-Nr: 8500829




- **Lifting points pivots 360°. Suspension ring pivots 180°**
- **Clamping spring** works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lifting mean possible respectively flat design if turned down.
- **Clear marking of the minimum WLL** for all loading directions.
- Available as:
 - Standard Metric Thread (DIN EN 13)
- Variable bolt lengths available for tapped or through holes.
- Tested and certified by DGUV Testing specifications: GS-OA-15-04:2012-05 Certificate No.: OA 1451016
- Quick and easy installation with just one bolt connection.
- Assembly with flat / ring wrench or allen key possible.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
- Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Load ring VLBG 7t M36 with special-bolt

Artikel-Nr: 8500829

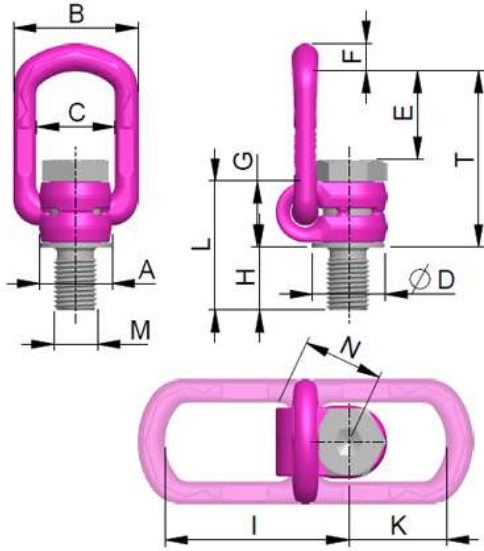

| | | |
|--------------------|---------|-----------|
| weight | 3.40 kg | 7.50 lbs |
| Nominal WLL | 7000 kg | 15430 lbs |
| T | 146 mm | 5-3/4" |
| A | 60 mm | 2-3/8" |
| B | 103 mm | 4-1/16" |
| C | 65 mm | 2-9/16" |
| D | 60 mm | 2-3/8" |
| E | 74 mm | 2-29/32" |
| F | 22,5 mm | 7/8" |
| G | 55 mm | 2-5/32" |
| H | 52 mm | 2-1/16" |
| I | 151 mm | 5-15/16" |
| K | 80 mm | 3-1/8" |
| L | 107 mm | 4-7/32" |
| M | M36 mm | M36 |
| N | 67 mm | 2-5/8" |