

## Load ring VLBG-Z 1,5t 5/8"-11UNC with variable length

Artikel-Nr: 8600442




Fully captive 100% crack detected hexagon head cap bolts with thread lengths of H= 16-148mm are available. When ordering implicitly indicate the required length.

- **Lifting points pivots 360°. Suspension ring pivots 180°**
- **Captive but exchangeable RUD-Bolt** with special corrosion protection Corrod-DT. Original RUD-Bolt is available as a spare part. Clear marking at the bolt head: RUD, thread size, batchno., class of strength.
- **Clamping spring** works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lifting mean possible respectivley flat design if turned down.
- **Clear marking of the minimum WLL** for all loading directions.
- Available as: - Standard Metric Thread (DIN EN 13) - Metric Fine Thread (DIN EN 13) - Coarse Pitch Thread UNC (ANSI B1.1) - Fine Thread UNF (ANSI B1.1)
- Variable bolt lengths available for tapped or through holes.
- Component according to the test criterias of BG/DGUV "GS-OA-15-04".
- Quick and easy installation with just one bolt connection.
- Assembly with flat / ring wrench or allen key possible.
- Hand tightening with appropriate wrench is sufficient for a singular lift. Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

## Load ring VLBG-Z 1,5t 5/8"-11UNC with variable length

Artikel-Nr: 8600442

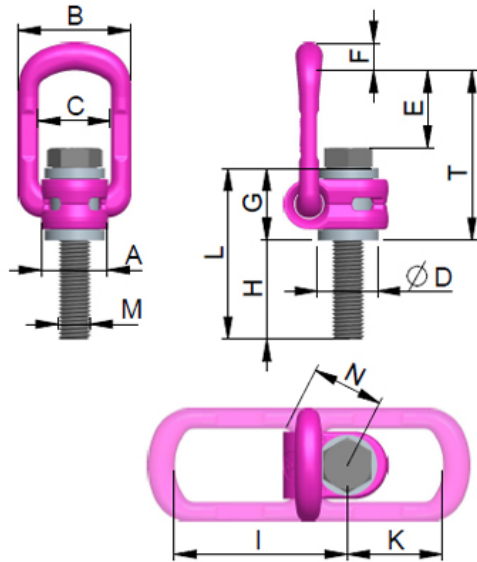

Nominal WLL	1500 kg	3300 lbs
T	85 mm	3-11/32"
A	33 mm	1-5/16"
B	56 mm	2-3/16"
C	36 mm	1-27/64"
D	30 mm	1-3/16"
E	39 mm	1-9/16"
F	13,5 mm	17/32"
G	36 mm	1-27/64"
H	16-148 mm	5/8" up to 5-13/16"
I	86 mm	3-3/8"
K	47 mm	1-7/8"
L	52-184 mm	2-1/16" up to 7-1/4"
M	5/8"-11UNC mm	5/8"-11UNC
N	38 mm	1-1/2"