

## VIP-Balancer VW-8

Artikel-Nr: 7904369




VIP-Balancers will be installed into 4-leg sling assemblies (2x 2-leg), to achieve an equal load distribution to all 4 legs. The length tolerances of the single legs will be compensated. You can calculate with 4 load bearing strands if the following criteria are fulfilled (BGR 500/DGUV-Regel 100-500):

- Two 2-leg slings, thereof one sling with a balancer.
- Both 2-leg slings will be attached to one hook (single or double crane hook)
- Symmetrical load spreading
- Max. inclination angle  $\beta$  45°

Other important RUD specific information and specialities to our VIP-Balancers can be found in the specific user instruction !

## VIP-Balancer VW-8

Artikel-Nr: 7904369

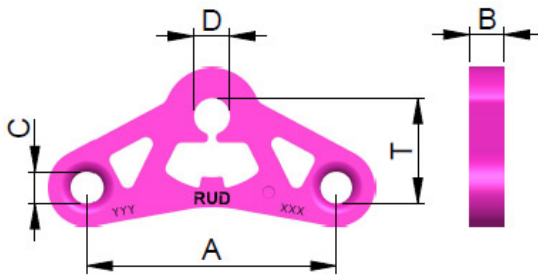

<b>weight</b>	1.16 kg	2.56 lbs
<b>T</b>	59 mm	2-15/16"
<b>A</b>	150 mm	5-7/8"
<b>B</b>	20 mm	3/4"
<b>C</b>	18 mm	23/32"
<b>D</b>	22 mm	7/8"