

VIP-Balancer VW-13

Artikel-Nr: 7904374




VIP-Balancers will be installed into 4-leg sling assemblies (2x 2-leg), to achieve an equal load distribution to all 4 legs. The length tolerances of the single legs will be compensated. You can calculate with 4 load bearing strands if the following criteria are fulfilled (BGR 500/DGUV-Regel 100-500):

- Two 2-leg slings, thereof one sling with a balancer.
- Both 2-leg slings will be attached to one hook (single or double crane hook)
- Symmetrical load spreading
- Max. inclination angle β 45°

Other important RUD specific information and specialities to our VIP-Balancers can be found in the specific user instruction !

VIP-Balancer VW-13

Artikel-Nr: 7904374

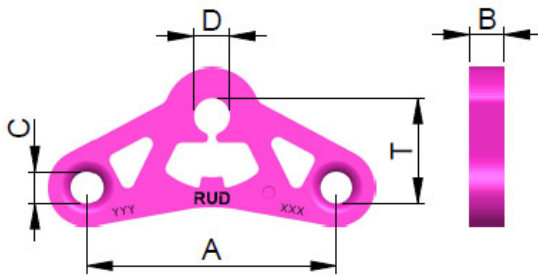

weight	4.37 kg	9.63 lbs
T	91 mm	3-9/16"
A	240 mm	9-1/2"
B	30 mm	1-3/16"
C	28 mm	1-1/8"
D	38 mm	1-1/2"