

## VIP-Balancer VW-20

Artikel-Nr: 7904725




VIP-Balancers will be installed into 4-leg sling assemblies (2x 2-leg), to achieve an equal load distribution to all 4 legs. The length tolerances of the single legs will be compensated. You can calculate with 4 load bearing strands if the following criteria are fulfilled (BGR 500/DGUV-Regel 100-500):

- Two 2-leg slings, thereof one sling with a balancer.
- Both 2-leg slings will be attached to one hook (single or double crane hook)
- Symmetrical load spreading
- Max. inclination angle  $\beta$  45°

Other important RUD specific information and specialities to our VIP-Balancers can be found in the specific user instruction !

## VIP-Balancer VW-20

Artikel-Nr: 7904725

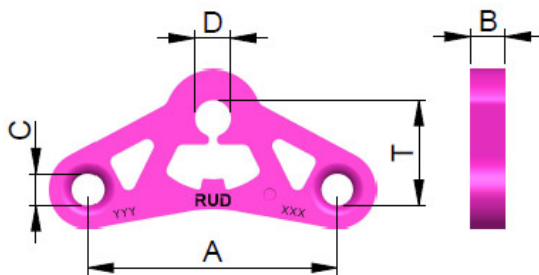

<b>weight</b>	10.74 kg	23.68 lbs
<b>T</b>	123 mm	4-27/32"
<b>A</b>	300 mm	11-13/16"
<b>B</b>	40 mm	1-9/16"
<b>C</b>	40 mm	1-9/16"
<b>D</b>	41 mm	1-5/8"