

VIP-Balancer VW-28

Artikel-Nr: 7907113




VIP-Balancers will be installed into 4-leg sling assemblies (2x 2-leg), to achieve an equal load distribution to all 4 legs. The length tolerances of the single legs will be compensated. You can calculate with 4 load bearing strands if the following criteria are fulfilled (BGR 500/DGUV-Regel 100-500):

- Two 2-leg slings, thereof one sling with a balancer.
- Both 2-leg slings will be attached to one hook (single or double crane hook)
- Symmetrical load spreading
- Max. inclination angle β 45°

Other important RUD specific information and specialities to our VIP-Balancers can be found in the specific user instruction !

VIP-Balancer VW-28

Artikel-Nr: 7907113

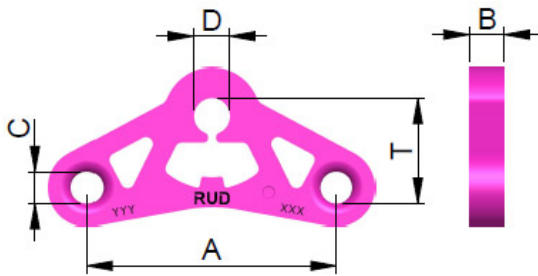

weight	35.29 kg	77.80 lbs
T	180 mm	7-1/16"
A	450 mm	17-11/16"
B	50 mm	1-31/32"
C	60 mm	2-3/8"
D	90 mm	3-17/32"