

## STARPOINT VRS-0,3t-G3/8"

Artikel-Nr: 7911864




Vario-Starpoint VRS with adapter to pipe thread G3/8" DIN ISO 228-1.

- Lifting points pivots 360°. Easy adjustment in load direction.
- Not exchangeable RUD-Bolt (this reduces the usage of improper standard bolts).
- Clear marking of the minimum WLL for all loading directions. Higher WLL possible when location and installation is optimised (compare WLL chart / product information).
- Clear marking at the bolt head: RUD, thread size, batch-no.
- Variable bolt lengths available for tapped or through holes.
- Available as: – Standard Metric Thread (DIN EN 13) – Metric Fine Thread (DIN EN 13) – Coarse Pitch Thread UNC (ANSI B1.1) – Fine Thread 8UN (ANSI B1.1) – Inch Pipe Thread (DIN 228)
- Significant product characteristics of the VRS are subject to property right claims.
- Component according to the test criterias of BG/DGUV "GS-HM 36".
- Complying with the US-Standard (ASME B30.26). Quick and easy installation with just one bolt connection.
- Installation and disassembly without any further tools than the exchangeable Easy-Fit star profile key for singular lifts (Version VRS-F).
- For permanent installation and recurrend lifts we can offer a special socket wrench to apply the requested torque (fits to a common Inch torque wrench).

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

# STARPOINT VRS-0,3t-G3/8"

Artikel-Nr: 7911864

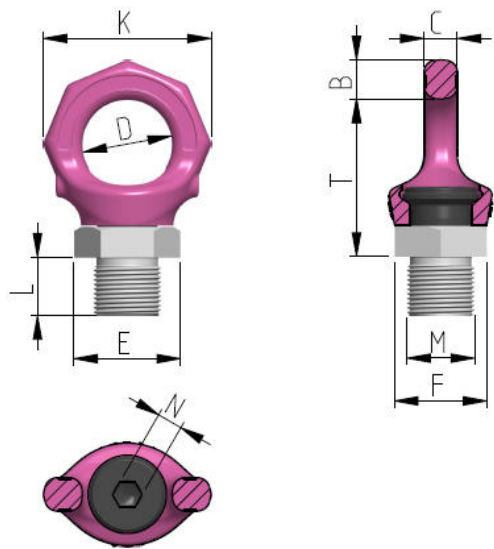

weight	0.20 kg	0.44 lbs
Nominal WLL	300 kg	1650 lbs
T	52 mm	2-1/16"
B	11 mm	7/16"
C	8,5 mm	11/32"
D	25 mm	63/64"
E	35 mm	1-3/8"
F	30 mm	1-3/16"
K	47 mm	1-7/8"
L	24 mm	15/16"
M	G 3/8" mm	G 3/8"
N	8 mm	5/16"