

VLBS

Loading Ring for Welding




Full WLL in any direction
with 4:1 design factor

100% electro-magnetic
crack detection tested

Clear marking of the WLL




Product features / VLBS Load ring



- ✓ Full WLL in any direction with 4:1 design factor
- ✓ 100% electro-magnetic crack detection tested
- ✓ Manufactured using high tensile CrNiMo - steel
- ✓ Rated capacity can be increased 100% in specific lashing applications
- ✓ Available with or without internal position holding springs
- ✓ Test certificates available
- ✓ Painted in the unique durable RUD pink powder coat finish

TYPE	WLL [t]	A	B	C	D	E	F	G	H	T	Weld HV+a	WEIGHT [kg]	Ref. No.
VLBS - 1.5	1.5	33	66	25	38	40	14	33	14	65	HV 5 + a3	0.35	7993035
VLBS - 2.5	2.5	36	77	27	45	48	16	40	14	75	HV 7 + a3	0.5	7994830
VLBS - 4	4.0	42	87	31	51	52	18	46	16	83	HV 8 + a3	0.8	7993036
VLBS - 6.7	6.7	61	115	44	67	73	24	60	22	117	HV 12 + a4	1.9	7993037
VLBS - 10	10.0	75	129	55	67	71	26.5	60	26	126	HV 16 + a4	2.9	7993040
VLBS - 16	16.0	96	190	69	100	105	40	90	26	174	HV 25 + a6	6.8	7906640

Dimensions and specifications subject to change

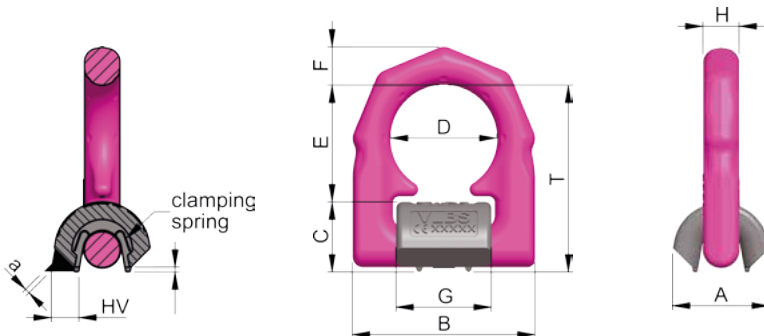

Head Office

12 Commerce Place, Larapinta QLD 4110
T: +61 7 3809 1300 F: +61 7 3809 1301

WA Office: Perth

107 Broadway, Bassendean WA 6054
T: +61 8 6278 1788 F: +61 8 6278 4788

E: sales@rud.com.au

W: www.rud.com.au

ABN: 74 010 547 949



Full Member

Quality ISO 9001

Environment ISO 9001

ISO 45001 Occupational Health and Safety

SAI GLOBAL