

Load ring VLBG-Z 20t 2"-4,5UNC with variable length

Artikel-Nr: 8600448




Fully captive 100% crack detected hexagon head cap bolts with thread lengths of H= 51-302mm are available. When ordering implicitly indicate the required length.

- **Lifting points pivots 360°. Suspension ring pivots 180°**
- **Captive but exchangeable RUD-Bolt** with special corrosion protection Corru-DT. Original RUD-Bolt is available as a spare part. Clear marking at the bolt head: RUD, thread size, batchno., class of strength.
- **Clamping spring** works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lifting mean possible respectively flat design if turned down.
- **Clear marking of the minimum WLL** for all loading directions.
- Available as: - Standard Metric Thread (DIN EN 13) - Metric Fine Thread (DIN EN 13) - Coarse Pitch Thread UNC (ANSI B1.1) - Fine Thread UNF (ANSI B1.1)
- Variable bolt lengths available for tapped or through holes.
- Component according to the test criterias of BG/DGUV "GS-OA-15-04".
- Quick and easy installation with just one bolt connection.
- Assembly with flat / ring wrench or allen key possible.
- Hand tightening with appropriate wrench is sufficient for a singular lift. Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Load ring VLBG-Z 20t 2"-4,5UNC with variable length

Artikel-Nr: 8600448

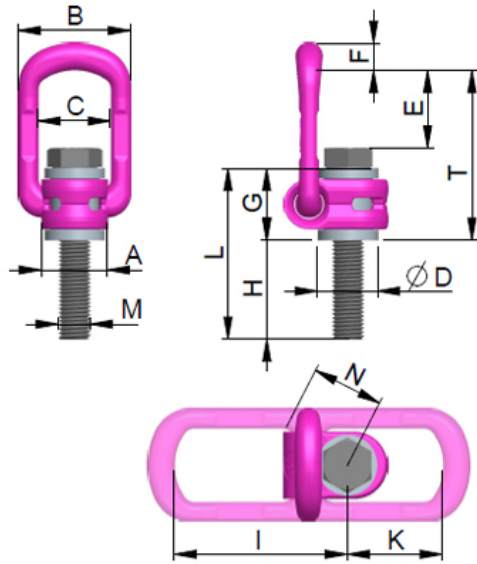

| Nominal WLL | 20000 kg | 44000 lbs |
|-------------|--------------|-------------------|
| T | 222 mm | 8-3/4" |
| A | 95 mm | 3-3/4" |
| B | 156 mm | 6-5/32" |
| C | 100 mm | 3-15/16" |
| D | 95 mm | 3-3/4" |
| E | 105 mm | 4-1/8" |
| F | 36 mm | 1-27/64" |
| G | 87 mm | 3-7/16" |
| H | 51-302 mm | 2" up to 11-7/8" |
| I | 230 mm | 9-1/16" |
| K | 130 mm | 5-1/8" |
| L | 138-389 mm | 5-7/16" up to 15- |
| M | 2"-4,5UNC mm | 2"-4,5UNC |
| N | 100 mm | 3-15/16" |